

PRODUCT INFORMATION SHEET



One Zenex Circle • Cleveland, Ohio 44146
Toll Free: 866-217-5100 • Fax: 440-232-5101

ZenaLube Dry

Dry PTFE Lubricant
ZENEX NUMBER 496205

DESCRIPTION

Specially made for lubricating items that require a clean dry substance to reduce friction at medium to low load resistance.

FEATURES AND BENEFITS

Reduces friction. Contains no silicones or petroleum oil that can collect dirt and dust.

APPLICATIONS AND USES

For use on metal, plastic and wood. Lubricates locks, hinges, equipment linkages, pulleys, bearings, slide mechanisms, gear drives, chain drives, windows, etc. Also recommended as a mold release agent for injection molding applications.

DIRECTIONS FOR USE


Shake well before using. Clean surface to be treated. Hold from 6 inches and spray a thin film on surface. Reapply as needed.

SIZE / AVAILABILITY

16 oz. Aerosol
Net Weight 11 oz.
12 per case

STATE RESTRICTION

None.

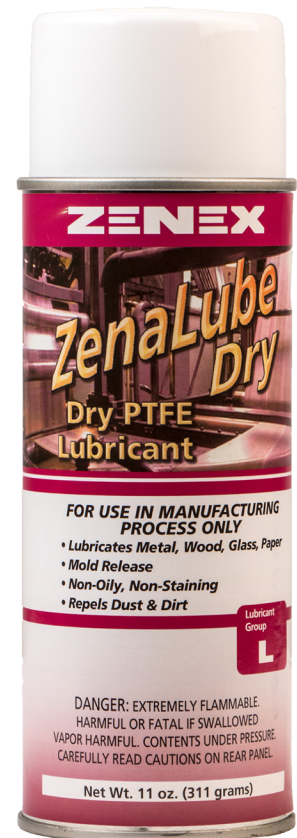

**Emergency
Phone Number
(800) 535-5053**

HMIS	
HEALTH	1
FLAMMABILITY	4
REACTIVITY	0
PERSONAL PROTECTION	B

